

KHAMBATI'S FIRE RATED METAL DOORS



Khambati's Furniture

Plot #93, ST-13/1, Sector 6-B, North Karachi
Industrial Area, Karachi Pakistan.



info@kfurnitures.com
www.kfurnitures.com

FIRE RATED METAL DOOR

SINGLE LEAF DOOR



CONFORMING TO NFPA 80 |
NFPA 252 | CAN-ULC S104

FEATURES

Doors can be used in dry wall and masonry construction.

- Khambati's doors are available in Cold Rolled Steel, Galvanised steel, Hot Dipped Electro Galvanized material.
- Door leaf thickness: 40 mm
- Material thickness (Gauges): 1.2mm (18 gauge)
- Painting: Prime painted materials can be used for hot rolled or cold rolled steel sheet.
- High aesthetics and robust structure
- Easy to install on a masonry wall opening & dry walls. Factory finished for primer and paint finishes.
- Conforming to highest quality standards

FIRE RATED METAL DOOR

ONE AND A HALF LEAF DOOR




FEATURES

Doors can be used in dry wall and masonry construction.

- Khambati's doors are available in Cold Rolled Steel, Galvanised steel, Hot Dipped Electro Galvanized material.
- Door leaf thickness: 40mm
- Material thickness (Gauges): 1.2mm (18 gauge)
- Painting: Prime painted materials can be used for hot rolled or cold rolled steel sheet.
- High aesthetics and robust structure
- Easy to install on a masonry wall opening & dry walls. Factory finished for primer and paint finishes.
- Conforming to highest quality standards

FIRE RATED METAL DOOR

DOUBLE LEAF DOOR

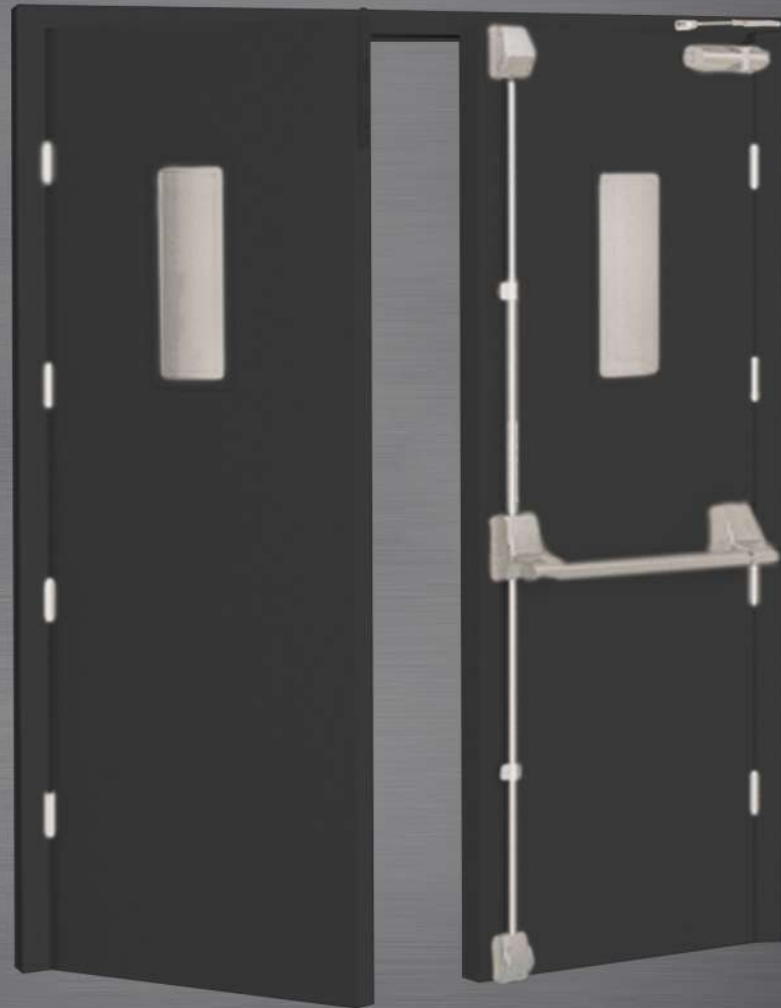


FEATURES

Doors can be used in dry wall and masonry construction.

- Khambati's doors are available in Cold Rolled Steel, Galvanised steel, Hot Dipped Electro Galvanized material.
- Door leaf thickness: 40 mm
- Material thickness (Gauges): 1.2mm (18 gauge)
- Painting: Prime painted materials can be used for hot rolled or cold rolled steel sheet.
- High aesthetics and robust structure
- Easy to install on a masonry wall opening & dry walls. Factory finished for primer and paint finishes.
- Conforming to highest quality standards

FIRE RATED METAL DOOR

EMERGENCY EXIT DOOR

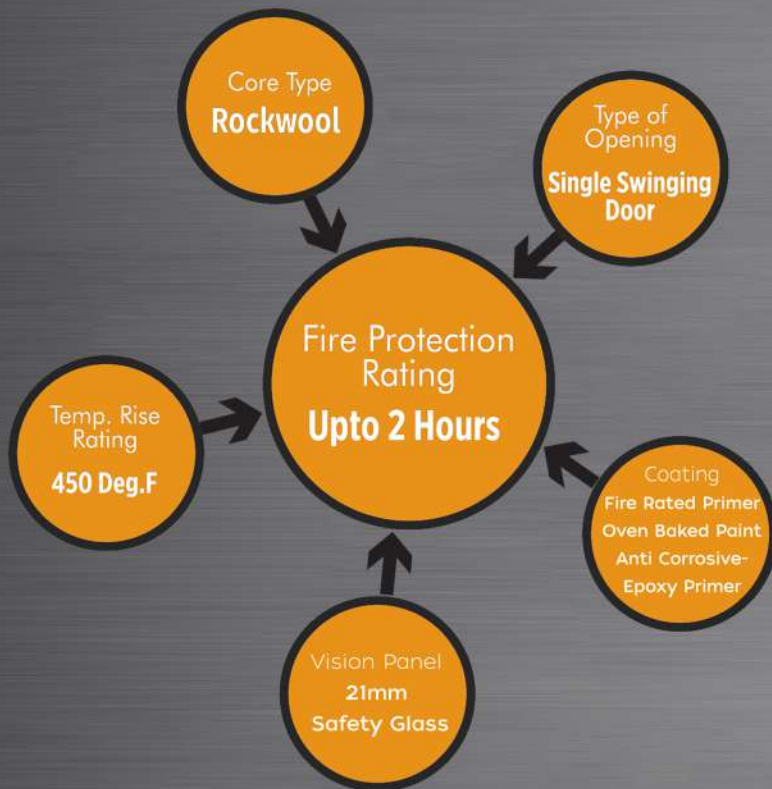

FEATURES

Doors can be used in dry wall and masonry construction.

- Khambati's doors are available in Cold Rolled Steel, Galvanised steel, Hot Dipped Electro Galvanized material.
- Door leaf thickness: 40mm
- Material thickness (Gauges): 1.2mm (18 gauge)
- Painting: Prime painted materials can be used for hot rolled or cold rolled steel sheet.
- High aesthetics and robust structure
- Easy to install on a masonry wall opening & dry walls. Factory finished for primer and paint finishes.
- Conforming to highest quality standards

AVAILABLE DOOR DESIGNS



FRD - 101




FRD - 201



FRD - 301



FRD - 401

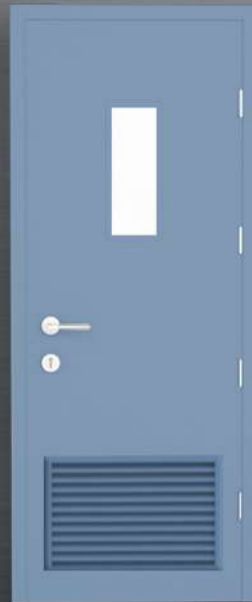

FRD - 501



FRD - 601

ACCESSORIES



Hinges



Panic Bar



D-Handle



Main Door Lock









Door Closer




Mortise
Dead Lock

TECHNICAL SPECIFICATIONS

| ITEM | TYPES OF DOORS |
|--|--|
| | Fire Rated Doors (90 - 120 min) |
|  Door Leaves | Constructed from 1.2mm (18 SWG) thick Skin of Galvanized Iron sheet |
| Thickness | 40 - 50mm |
| In-Fill | Rockwool/ Mineral Wool |
| Door Frames | Constructed from 1.6mm (16 SWG) thick Skin of Galvanized Iron sheet |
| Vision Glass (VG) | 21mm Thick Clear Double Glazed Safety Glass. Dimensions: 8" x 24" |
| VG Coating | The door frames and door shutter are primed with Zinc-Phosphate Stoving Primer and finished with Polyurethane Aliphatic grade of epoxy paint as required |
| Powder Coating | Epoxy Polyester / Pure Polyester / Polyurethane. Thickness: 90 - 100 Microns |
|  Accessories | |
|  Hinges | Material- Stainless Steel Ball Bearing Butt Hinges, Dimensions- 3" X 4", Thickness- 3mm |
|  Lock | Mortise Sash Lock with Lever Handles, Mortise Dead Bolt, Mortise Latch, Panic Devices etc. can be provided as required |
|  Flush Bolts (Double Doors) | Concealed extended lever action flush bolts provided on the top of the door to the leading stile edges |
|  Door Closers | Doors are made suitable to receive a large variety of door closers |

IDEALLY
DESIGNED
STEEL
FURNITURE **KHAMBATI'S**



KHAMBATI'S FURNITURE

Plot #93, ST-13/1, Sector 6-B, North Karachi Industria Area,
Karachi Pakistan.

Cell: +92 300 2473114 / +92 334 0000075

Tel: +92 21 36962593

info@kfurnitures.com

www.kfurnitures.com

